

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden


Instruction No 30737623
Version 1.0
Part. No.

Treble loudspeakers

Equipment



A0000162

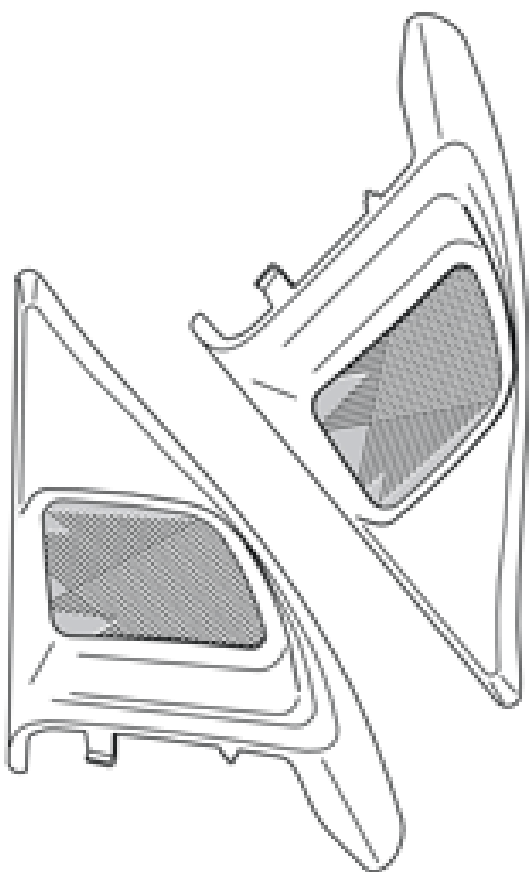

J3905332

Rear



Front



Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

INTRODUCTION

Read through all of the instructions before starting installation.


Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.

Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

1

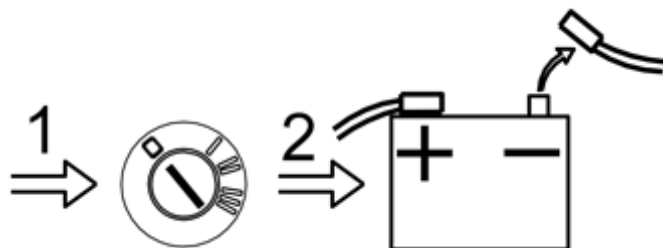

Turn the ignition switch to position 0.

Remove the ignition key from the ignition switch.

Disconnect the negative lead from the battery.

Note!

Wait at least five minutes before disconnecting the connector or disconnecting other electrical equipment.


A8800136

Preparations, front doors

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

2

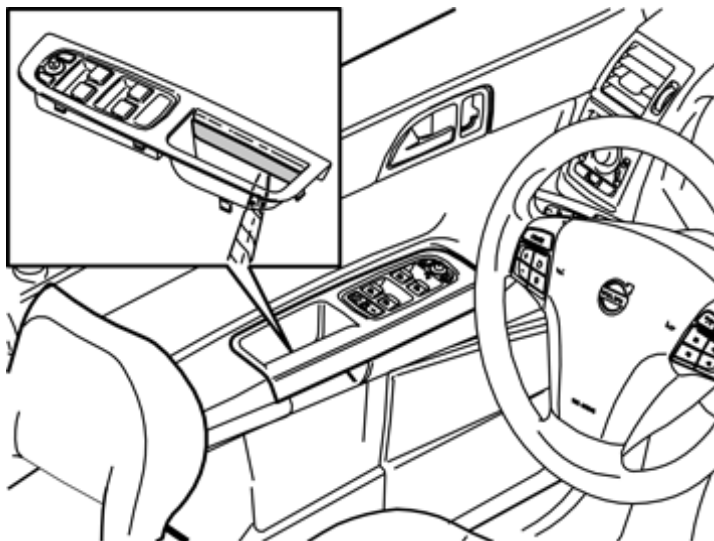


J8504581

Preparations, front doors

Remove the small internal panel from the door handle. Carefully prize it away using a weatherstrip tool, opposite the three catches in the joint underneath.

3A

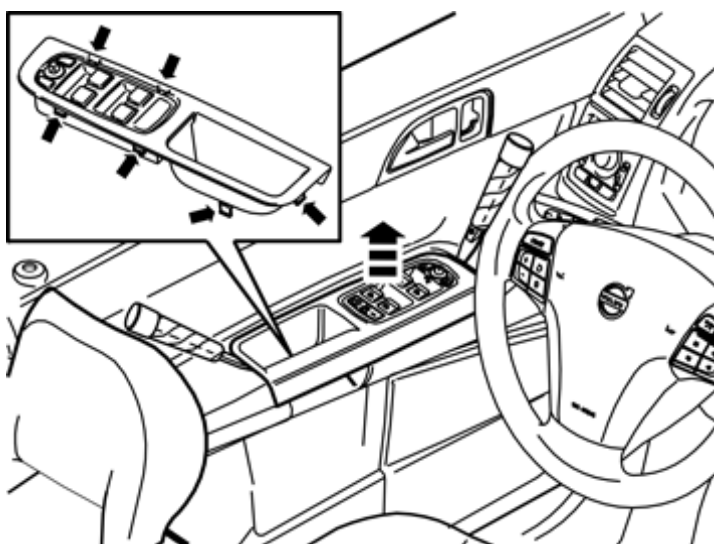

J8504582

Illustration A


Detach the door handle's panel with the door module.

Carefully prize it away all around using a weatherstrip tool and pull it up. It is secured with six catches in the door panel.

Illustration B

Remove the connector from the door module.

3B

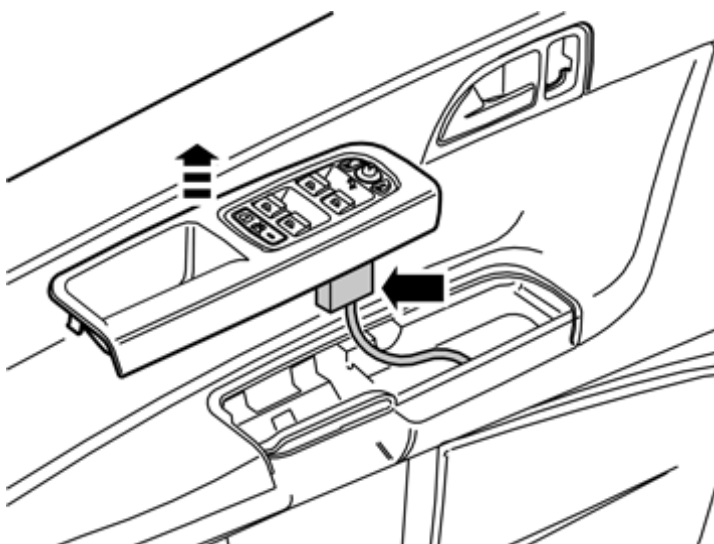


J8504591

Installation instructions, accessories


Volvo Car Corporation Gothenburg, Sweden

4

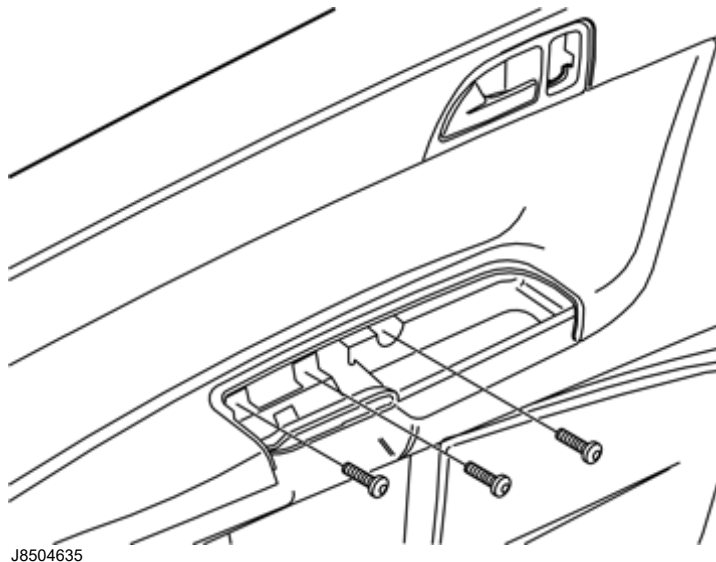

Remove the three screws holding the door panel to the side of the door.

5

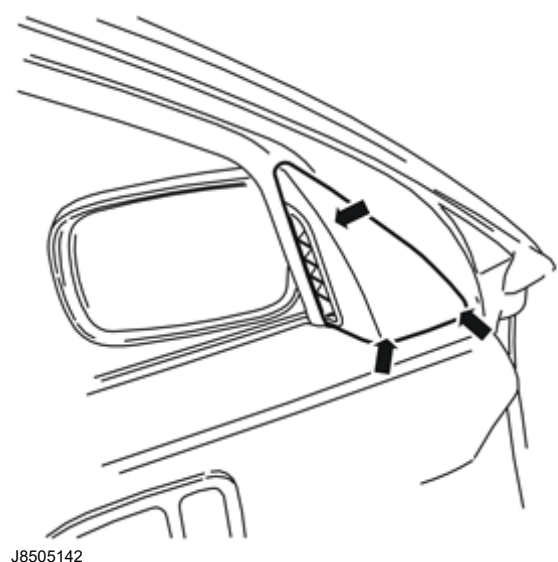

Remove the small panel at the front edge/top edge of the door. Carefully prize it away using a weatherstrip tool, opposite the three clips.

Note!


The panel is fitted securely, be careful with the surrounding parts.

Place the panel to one side, the new panel with loudspeaker grille is in the kit.

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

6

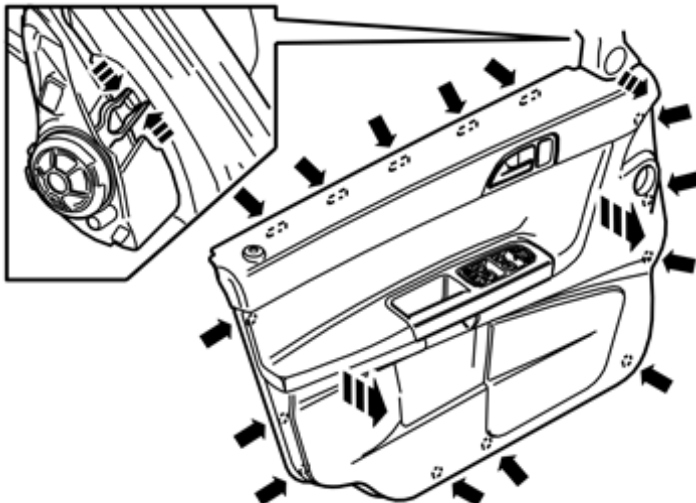

J8504699

Detach the door panel from the side of the door by carefully prizing it away opposite the nine clips at the sides and furthest down using a weatherstrip tool.

Note!

The panel is fitted securely, so handle with care when removing.

Detach the panel at the top edge until the five clips release. Press the two catches together (see inset illustration) which hold the treble loudspeaker's bracket to the side of the door, so that the door panel detaches there.


Unhook the door panel from the lock button.

Installing the treble loudspeakers, front doors

Installation instructions, accessories


Volvo Car Corporation Gothenburg, Sweden

7A

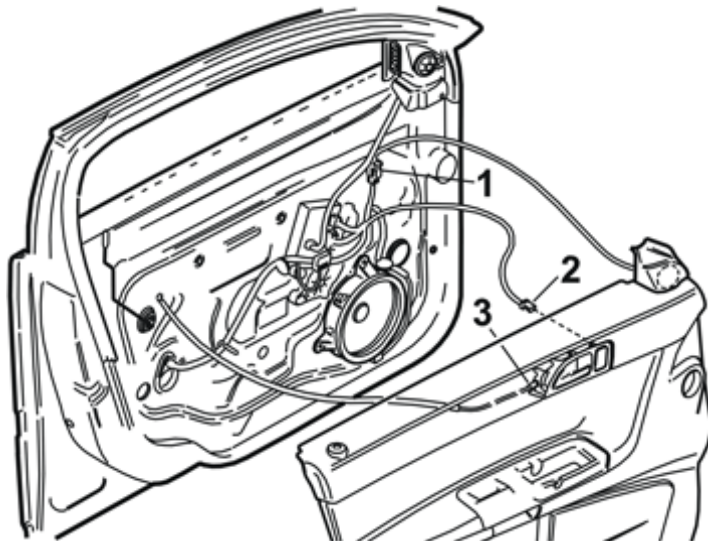

J8505141

7B

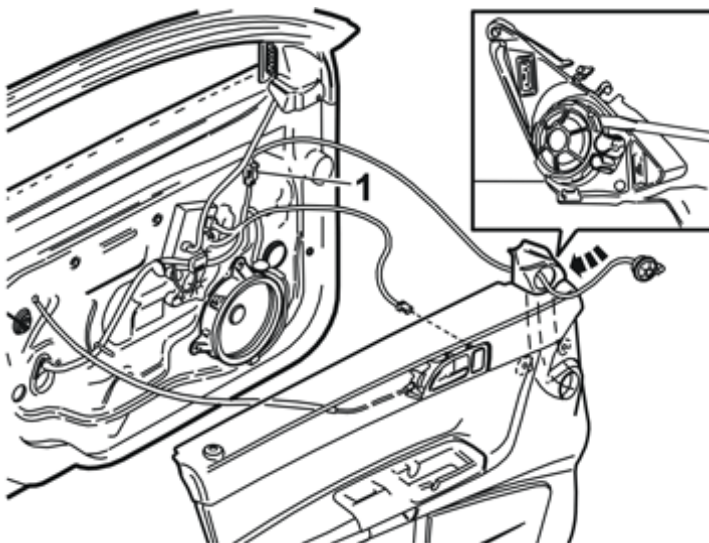

J3904628

Installing the treble loudspeakers, front doors

Illustration A

Detach the connector (1) to the treble loudspeaker's cable, if fitted to the car.

Detach the connector (2) to the door opener.

Detach the sleeve with cable (3) from the door opener.

Remove the door panel.

Illustration B

Place the door panel on a suitable surface so that it cannot be damaged.

Take the new treble loudspeaker with cable harness and insert the cable harness in the front edge of the hole in the treble loudspeaker's bracket. Space is limited in the hole but the connector fits exactly. Pull the connector on the inside of the door panel so that it appears between the door panel and the air duct.

Align the treble loudspeaker in the hole and press it in. Make sure that all catches have engaged.

Route the cable harness from the rear side of the air duct. The connector is connected to the routed connector at position (1) in connection with reinstalling the door panel.

8

Check that the nine clips are in the open position and that they are intact, replace if necessary.

Connect the connector to the door opener.

Connect the connector to the treble loudspeaker.

Reinstall the cable with sleeve to the door opener.

Press in the door panel and tighten it with the three screws.

Connect the connector to the door module. Press in the panel with door module in the door panel. Make sure that all catches have engaged.

Reinstall the small panel in the door handle panel.

Install the new loudspeaker grille from the kit in the front edge/top edge of the door.


Repeat steps 2-8 for the other side.

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

Preparations, rear doors

9

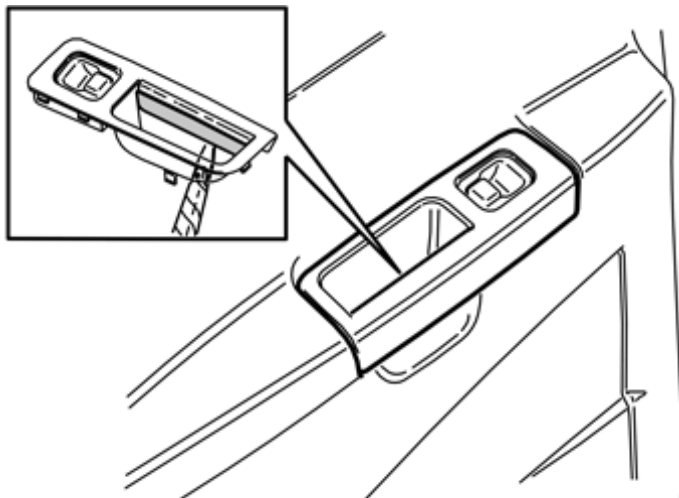

J8504631

Preparations, rear doors

Remove the small internal panel from the door handle. Carefully prize it away using a weatherstrip tool, opposite the three catches in the joint underneath.

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden


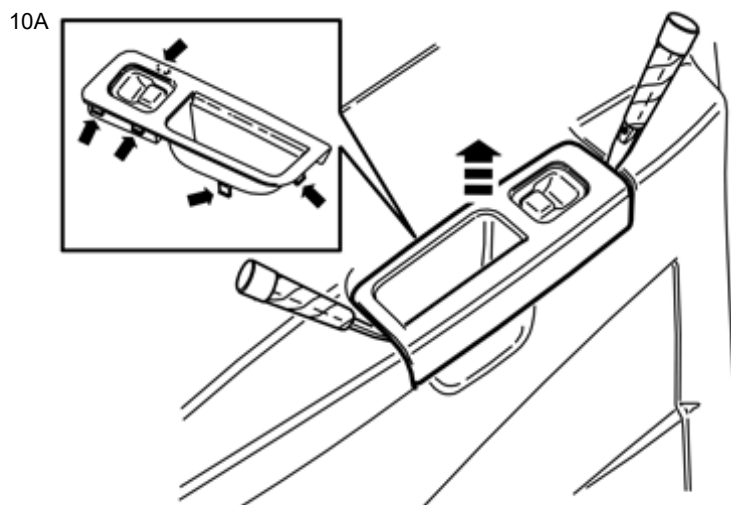


Illustration A

Detach the door handle's panel with the door module. Carefully prize it away all around using a weatherstrip tool and pull it up. It is secured with five catches in the door panel.

Illustration B

Detach the connector on the underside of the door module.

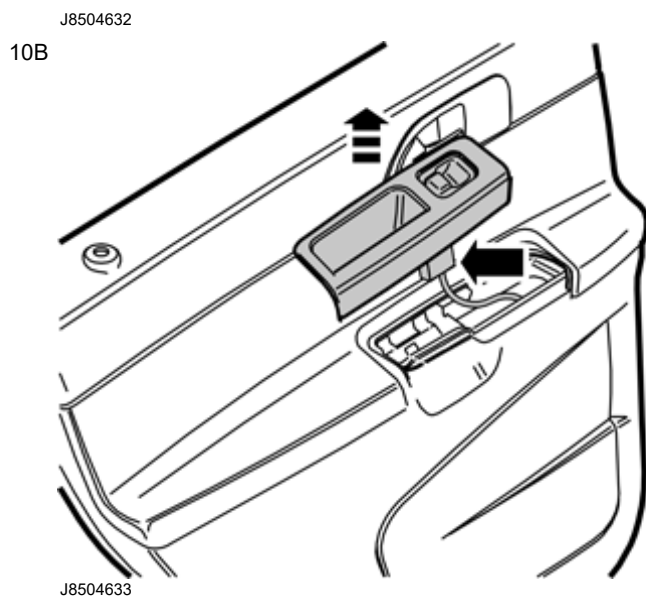


Remove the two screws holding the door panel to the side of the door.

Detach the door panel from the side of the door by carefully prizing it away opposite the eight clips at the sides and furthest down using a weatherstrip tool. Detach the door panel at the top edge until the four clips release.

Unhook the door panel from the lock button.


Installing the treble loudspeakers, rear doors

12A

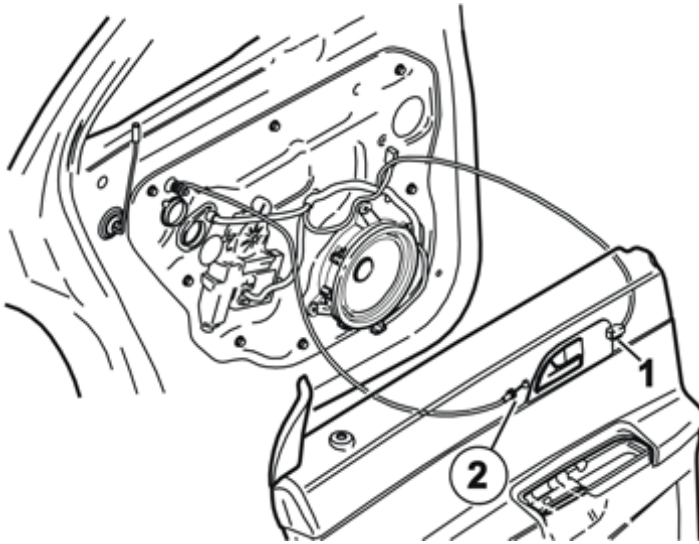

J3905333

12B

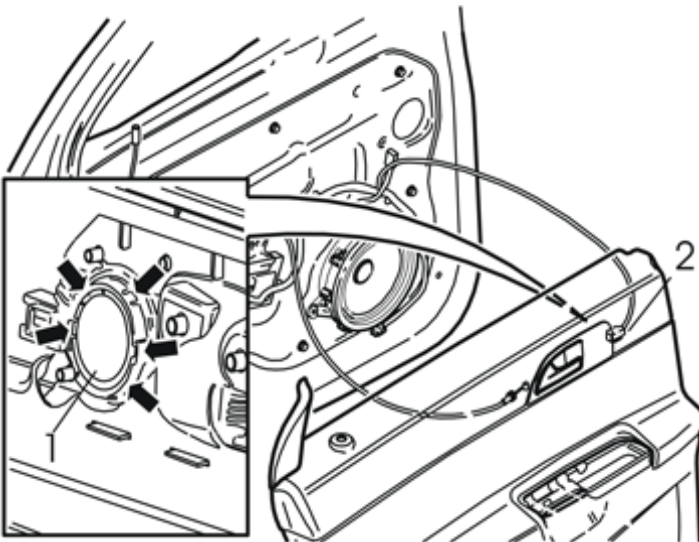

J3904578

Installing the treble loudspeakers, rear doors

Illustration A

Detach the connector (1) on the holder for the treble loudspeaker.

Detach the sleeve with cable (2) from the door opener.

Place the door panel to one side.

Illustration B

Place the door panel on a suitable surface so that it cannot be damaged.

Remove the holder (1) for the treble loudspeaker in front of the door opener, by carefully prizing it away with a small screwdriver. It is secured with five catches all around (see inset illustration).

Place the holder to one side, the holder with treble loudspeaker is in the kit.

Press in the new treble loudspeaker with holder in the same place. Make sure that all catches have engaged. The connector (2) is connected to the treble loudspeaker in connection with reinstalling the door panel.

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

13

Check that the eight clips are in the open position and that they are intact, replace if necessary.

Connect the connector to the treble loudspeaker.

Reinstall the cable with sleeve to the door opener.

Guide up the door module connector through the hole in the door panel.


Press in the door panel and tighten it with the two screws.

Connect the connector to the door module. Press in the panel with door module in the door panel. Make sure that all catches have engaged.

Reinstall the small panel in the door handle panel.

Repeat steps 9-13 for the other side.

14

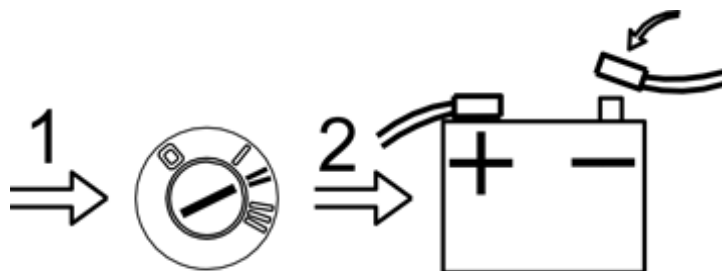

Insert the key into the ignition switch and turn it to position II.

Reconnect the battery negative lead.

A8800137