

Volvo Car Corporation Gothenburg, Sweden

Instruction No 31659035 Version 1.1 Part. No. 31659034

Child seat, isofix mounting, front

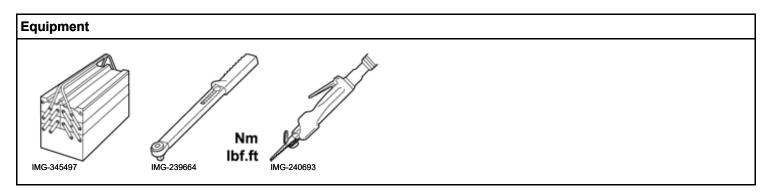

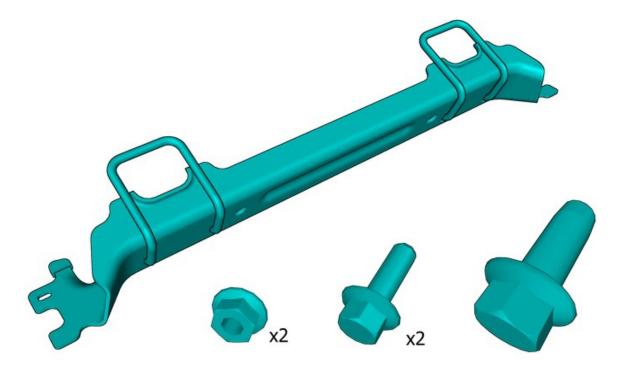

Information

1

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.


Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

Color symbols

2

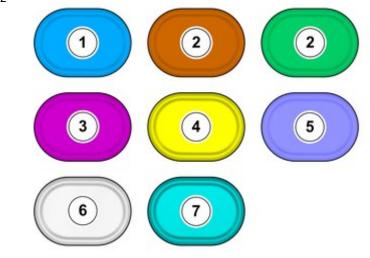

Note!


This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- Used for focused component, the component with which you will do something.
- Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6. Used as background color for vehicle components.
- 7. Used for accessory components.

Volvo Car Corporation Gothenburg, Sweden



IMG-442591

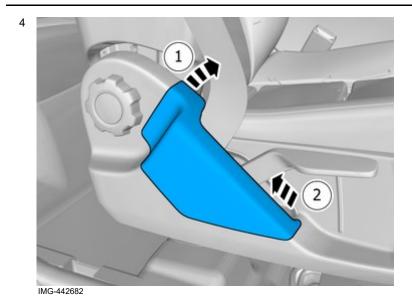

Remove the panel.

Volvo Car Corporation Gothenburg, Sweden

13 mm


Remove the screw.

The item is not to be reused.

Loosen the marked detail.



Volvo Car Corporation Gothenburg, Sweden

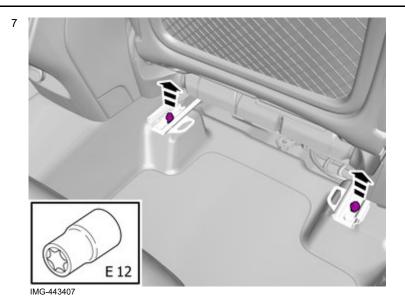


Remove the screws.

Tightening torque: Front seat to body, 40 Nm




Volvo Car Corporation Gothenburg, Sweden

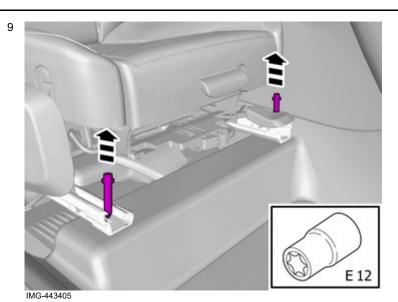


Remove the screws.

Tightening torque: Front seat to body, 40 Nm

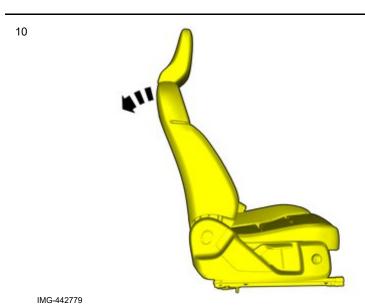

Volvo Car Corporation Gothenburg, Sweden

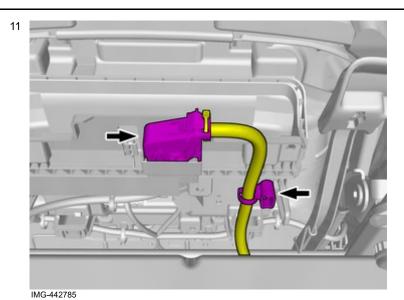


Disconnect the connector.

Unhook the cable harness clips.



Caution!
Be extra careful when removing or installing this component.


Volvo Car Corporation Gothenburg, Sweden

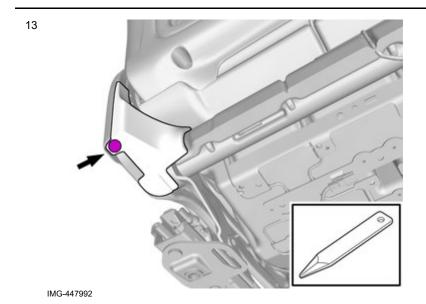

Remove the clip.

Repeat on the other side.


14



Remove the panel.


Repeat on the other side.

Volvo Car Corporation Gothenburg, Sweden

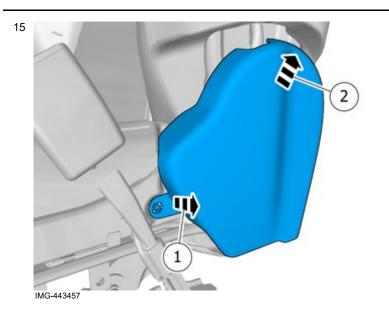

Remove the panel.

Applies to vehicles with chassis number until 58012

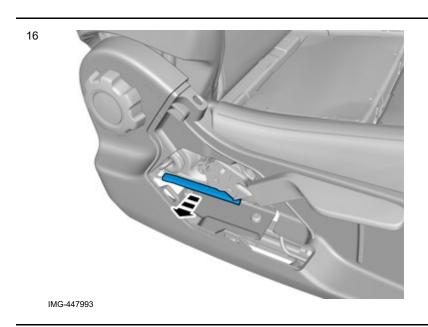


Remove the marked part.

The item is to be reused.

All vehicles

Accessory installation


Volvo Car Corporation Gothenburg, Sweden

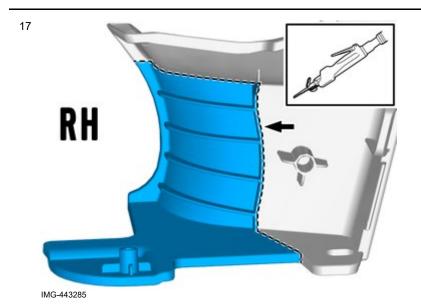

Remove part of component according to image.

Use: Air-powered air saw

Even out the edges using a knife or file.

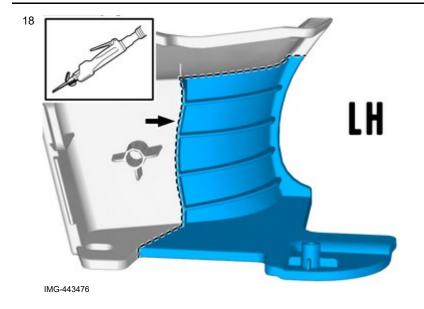

Remove part of component according to image.

Use: Air-powered air saw


Even out the edges using a knife or file.

Volvo Car Corporation Gothenburg, Sweden

19

Install component that comes with the accessory kit.

IMG-456313

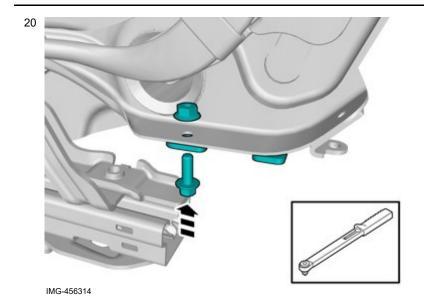

Install components that come with the accessory kit.


Repeat on the other side.

Tightening torque: Isofix mounting to front seat, 6 Nm

Installation

Applies to vehicles with chassis number until 58012

Volvo Car Corporation Gothenburg, Sweden

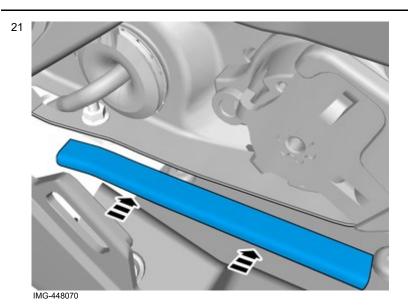


Reinstall the removed part.

All vehicles

22

Reinstall the removed parts in reverse order.

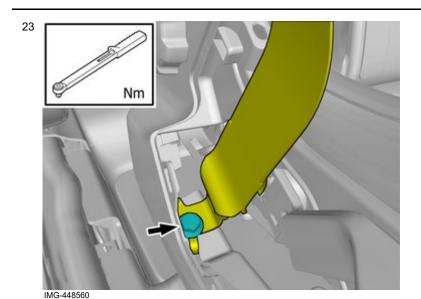

Reinstall the removed part.

Install component that comes with the accessory kit.

Tightening torque: Seat belt bracket, to Seat , 40 Nm