

Volvo Car Corporation Gothenburg, Sweden

Instruction No 31428168 Version 1.1 Part. No.

32270767, 32270766

Alarm, siren

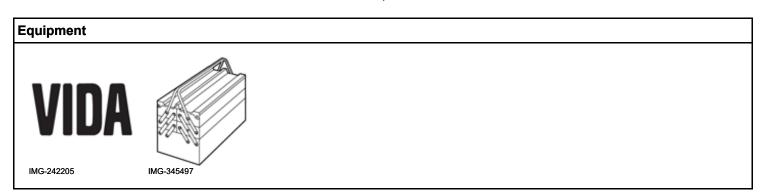






IMG-410618

Volvo Car Corporation Gothenburg, Sweden

	Information
1	Read through all of the instructions before starting installation.
	Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.
	Ensure that all tools stated in the instructions are available before starting installation.
	Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.
	In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.
	Color symbols

2



IMG-363036

Note!

This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- Used for focused component, the component with which you will do something.
- 2. Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6. Used as background color for vehicle components.


Preparation

Volvo Car Corporation Gothenburg, Sweden

3



Removal

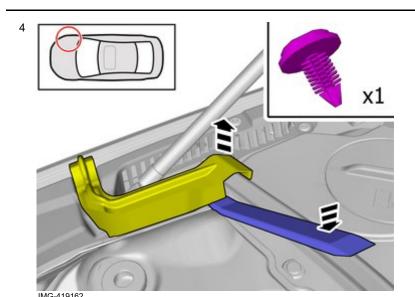


Remove the clip.


Fold marked part aside.

Use: Clip remover

Volvo Car Corporation Gothenburg, Sweden

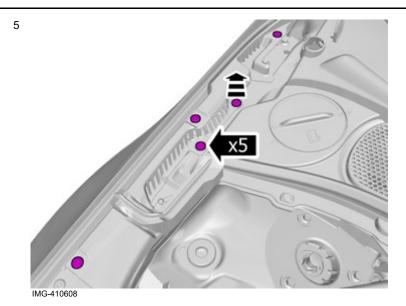

Remove the clips.

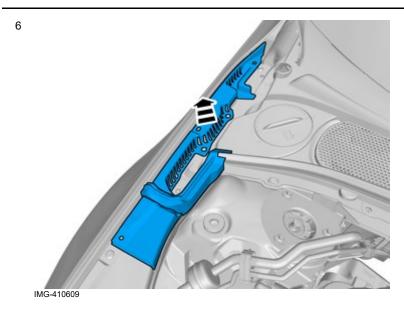


Remove the marked part.


Volvo Car Corporation Gothenburg, Sweden




Remove the marked part.

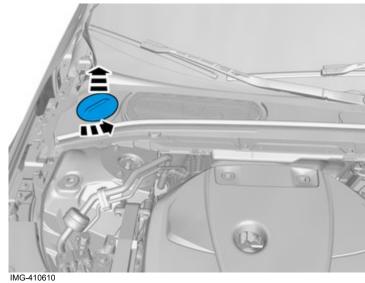



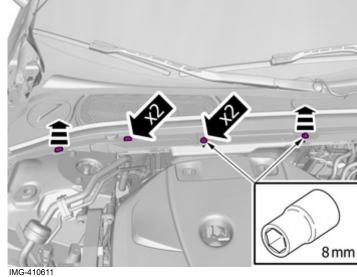


Volvo Car Corporation Gothenburg, Sweden

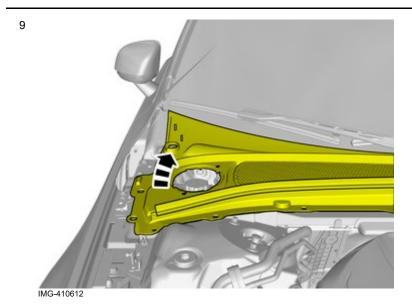


Fold marked part aside.

Accessory installation

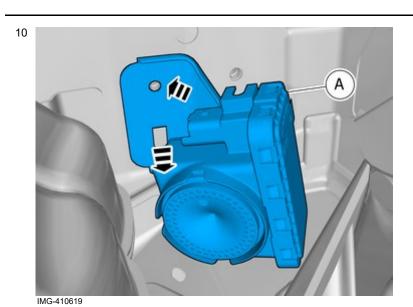


Place the component where indicated in the graphic.

Volvo Car Corporation Gothenburg, Sweden

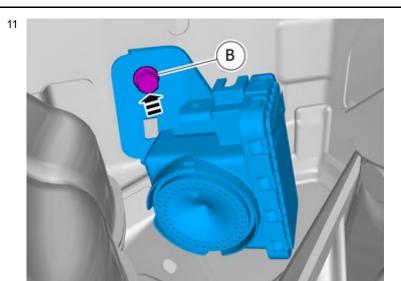

Tighten the screw.

Tightening torque: M6, 10 Nm

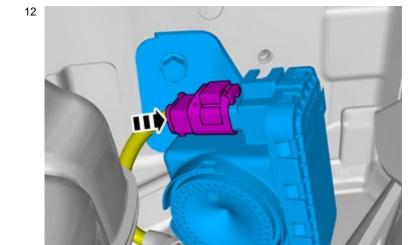

Connect the connector.

13


IMG-410621

IMG-410620

Reinstall the removed parts in reverse order.

Volvo Car Corporation Gothenburg, Sweden

IMG-242268

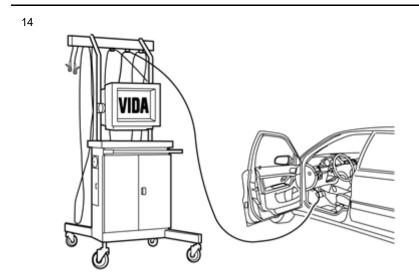

Download software (application) for the accessory's function according to the service information in VIDA.