

Volvo Car Corporation Gothenburg, Sweden

 Instruction No
 Version
 Part. No.

 32207531
 1.1
 39792495, 39791343, 39791341, 39791339, 39791337, 39792501, 39791335, 39792499, 39791333, 39791331, 39791329, 39791325, 39791323

# Spoiler, boot lid

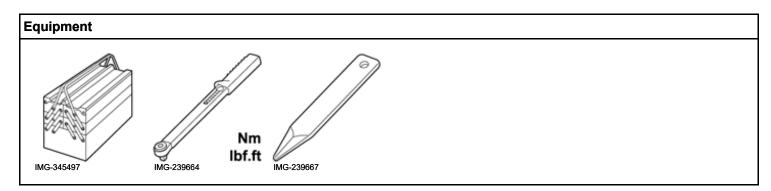

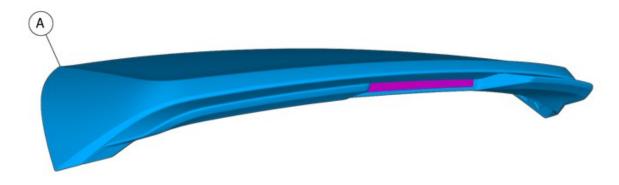


IMG-440226

Volvo Car Corporation Gothenburg, Sweden

	Information
1	Read through all of the instructions before starting installation.
	Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.
	Ensure that all tools stated in the instructions are available before starting installation.
	Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.
	In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.
	Color symbols

2



IMG-363036

#### Note!

This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- Used for focused component, the component with which you will do something.
- 2. Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- ${\bf 6.} \ {\bf Used} \ {\bf as} \ {\bf background} \ {\bf color} \ {\bf for} \ {\bf vehicle} \ {\bf components}.$


### Removal

Volvo Car Corporation Gothenburg, Sweden

3

Open the tailgate.




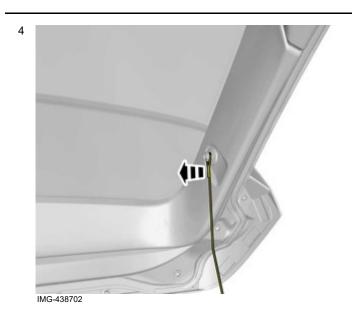

Remove the part carefully


Repeat on the other side.

Volvo Car Corporation Gothenburg, Sweden

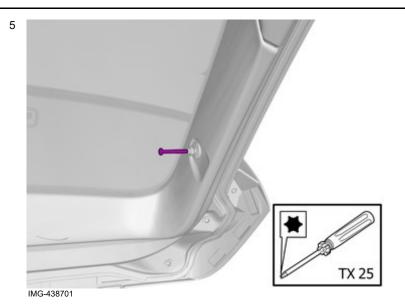

Remove the screw.


Repeat on the other side.

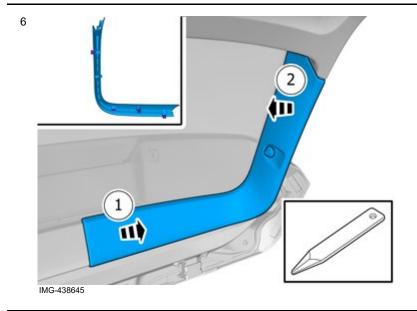


Remove the marked part.

Repeat on the other side.

Volvo Car Corporation Gothenburg, Sweden

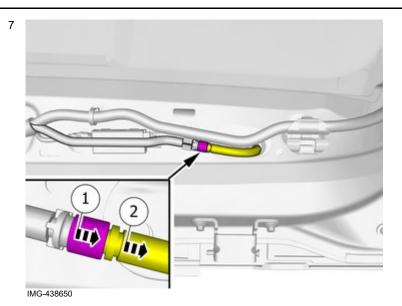


- 1. Release the lock.
- 2. Undo the hose from the connection.

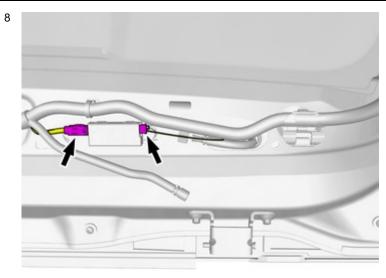

Disconnect the connectors.

IMG-438665


Volvo Car Corporation Gothenburg, Sweden

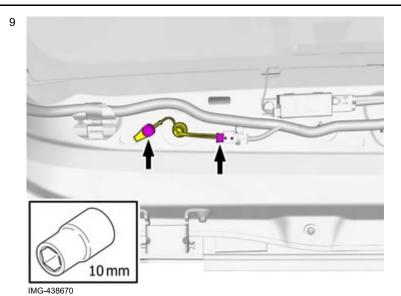

Remove the screw.

Tightening torque: M6, 10 Nm


Disconnect the connector.

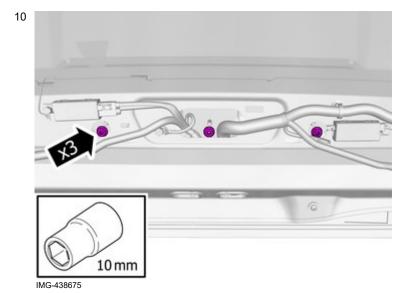


Remove the nuts.

Tightening torque: Nut spoiler rear , 4 Nm

Volvo Car Corporation Gothenburg, Sweden

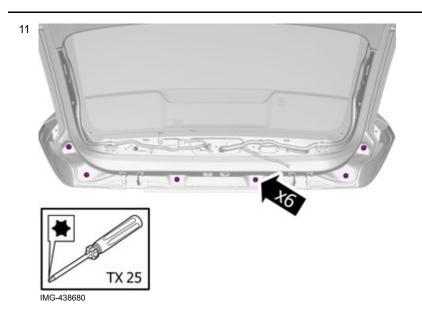

Remove the screws.

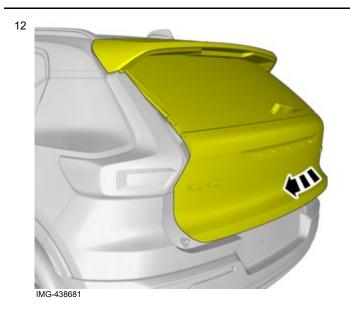

Close the tailgate

Volvo Car Corporation Gothenburg, Sweden

13


Note! Orientation view

### Note!

The graphic shows the back of the component before removal.

IMG-438695

14

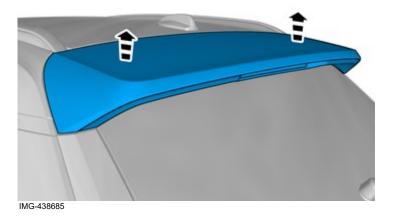

#### Caution!

Make sure not to damage painted surfaces.


Request the aid of a colleague for this procedure.

Loosen the component indicated. Do not remove it.

Volvo Car Corporation Gothenburg, Sweden


15

- 1. Loosen the marked details.
- 2. Remove the marked part.

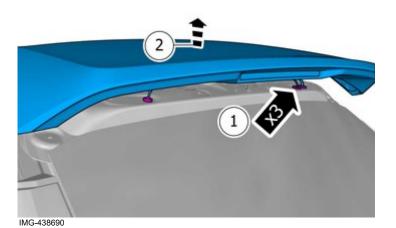

### **Accessory installation**

16




#### Caution!

Make sure that the rubber grommet seals properly to the body.

IMG-438700

Volvo Car Corporation Gothenburg, Sweden

17

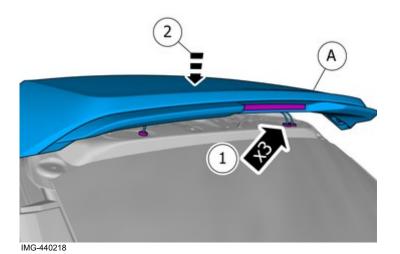

Caution!
Make sure not to damage painted surfaces.

Request the aid of a colleague for this procedure.

- 1. Install the marked components.
- 2. Install the marked component.

18

Reinstall the removed parts in reverse order.