
Volvo Car Corporation Gothenburg, Sweden

Instruction No 31213740


Version 1.4

Part. No. 30779760, 30779759


Mudflaps

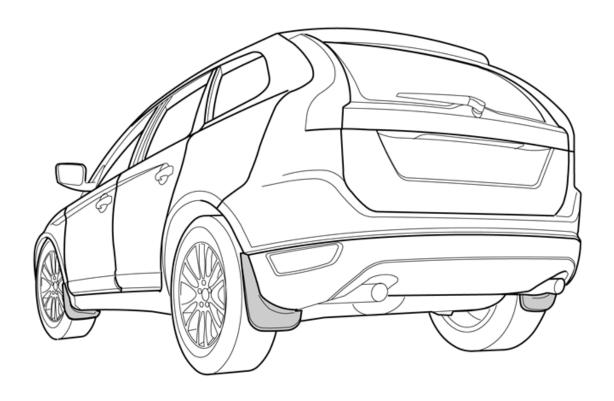

IMG-281763

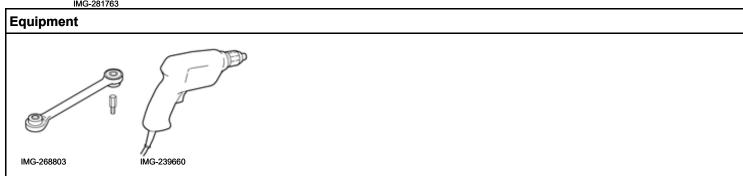

Volvo Car Corporation Gothenburg, Sweden

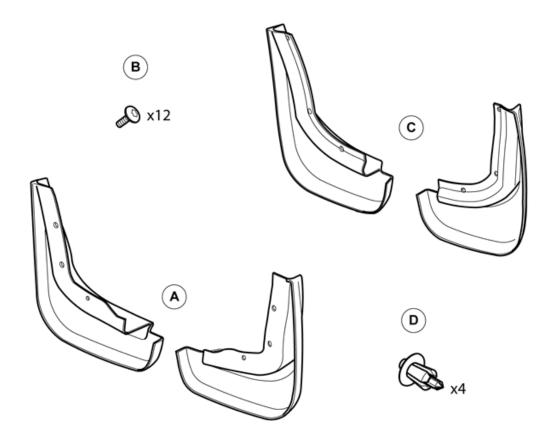

IMG-281764

Volvo Car Corporation Gothenburg, Sweden

Any comments on this publication? Please contact your nearest retailer. Thank You!			
Publ.no:	Issue:	Kit no:	
Comments:			
From:			
Address:			
Telephone:			
Telefax:			

IMG-213320

Volvo Car Corporation Gothenburg, Sweden

INTRODUCTION

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.

Ensure that all tools stated in the instructions are available before starting installation.


Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

1

Installation of front mudflaps


IMG-285504

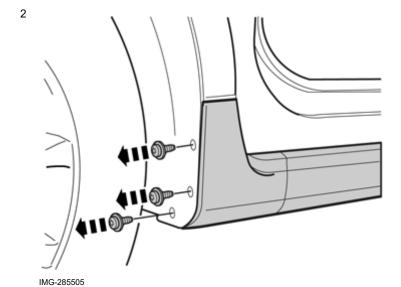


© Volvo Car Corporation Mudflaps- 31213740 - V1.4


Page 4 / 10

Volvo Car Corporation Gothenburg, Sweden

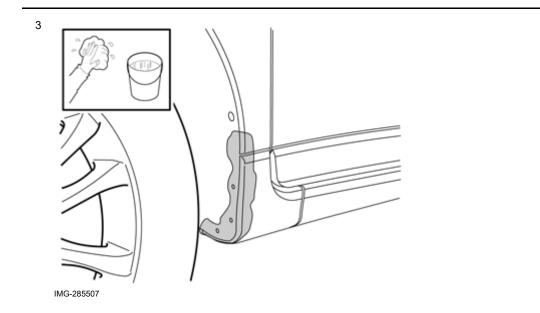

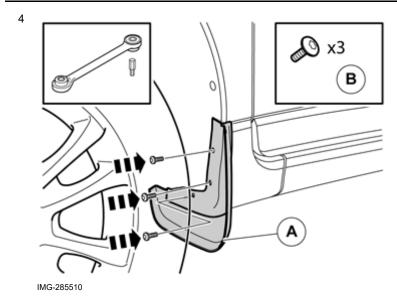


Volvo Car Corporation Gothenburg, Sweden

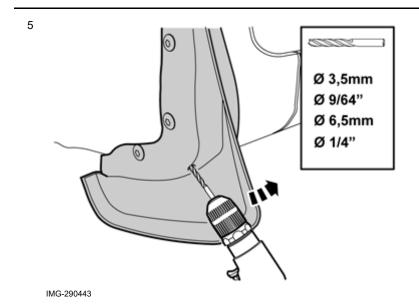

Bend the mudflap backwards and drill a 3.5 mm (9/64") hole in the marking underneath.

Drill out the hole using a 6.5 mm (1/4") drill bit.


Clean the hole edges.

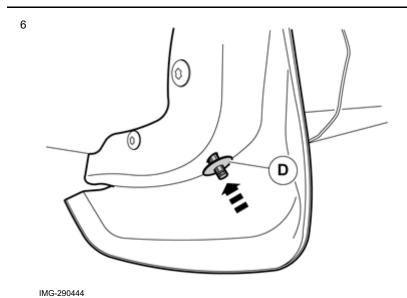

Take a clip from the kit and press into the hole.


Volvo Car Corporation Gothenburg, Sweden

Installation of rear mudflaps

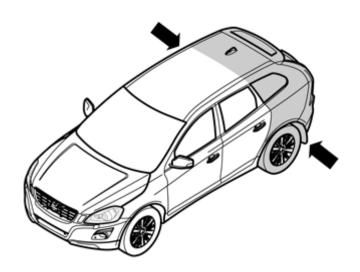



IMG-281783

7

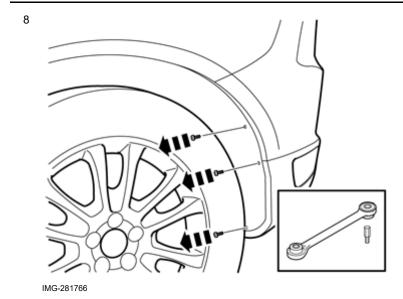


Volvo Car Corporation Gothenburg, Sweden

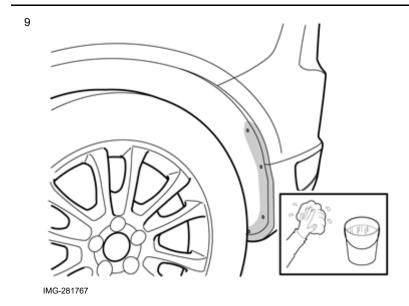

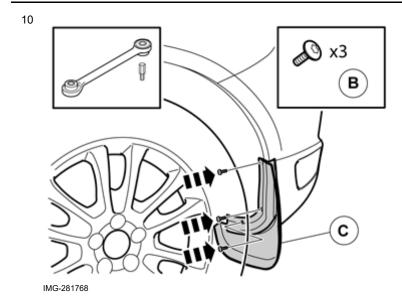

Volvo Car Corporation Gothenburg, Sweden

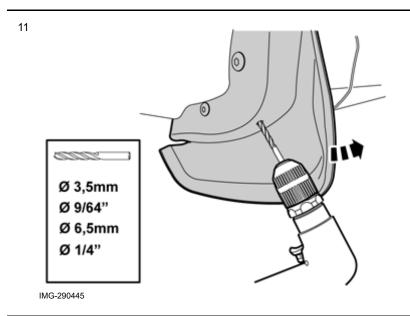


Bend the mudflap backwards and drill a 3.5 mm (9/64") hole in the marking underneath.

Drill out the hole using a 6.5 mm (1/4") drill bit.

Clean the hole edges.


12




Take a clip from the kit and pull out the central pin.

IMG-290446

Volvo Car Corporation Gothenburg, Sweden

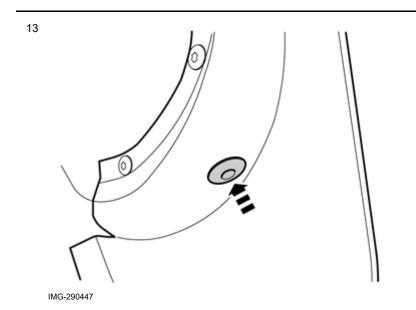

Press the clip into the hole.

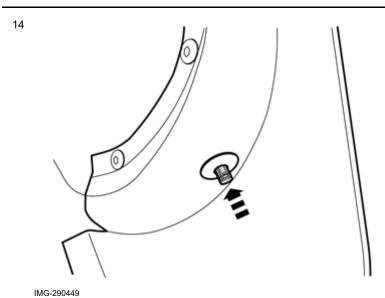

Press the central pin into the clip.