
Volvo Car Corporation Gothenburg, Sweden


Instruction No 30772374

Version 1.3 Part. No.

30739021, 30772165

Alarm, switch

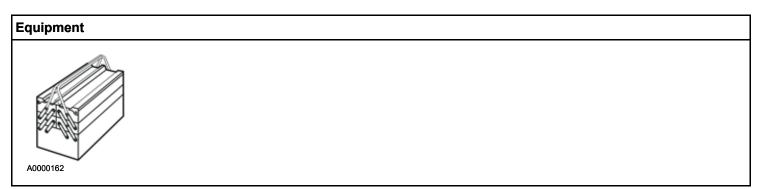



IMG-233785

Volvo Car Corporation Gothenburg, Sweden

Any comments on this publication? Please contact your nearest retailer. Thank You!				
Publ.no:		Issue:	Kit no:	
Comments:				
From:				
Address:				
Telephone:				
Telefax:				

IMG-213320

Volvo Car Corporation Gothenburg, Sweden

INTRODUCTION

Read through all of the instructions before starting installation.


Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.


Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.


In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

1






IMG-214981

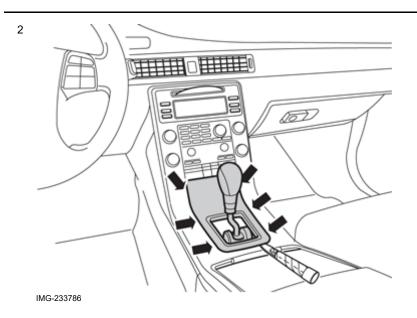


Carefully prize away the panel around the gear selector lever using a weatherstrip tool. It is secured along the longitudinal sides with six catches. Start prizing in the rear edge of the panel.

Volvo Car Corporation Gothenburg, Sweden

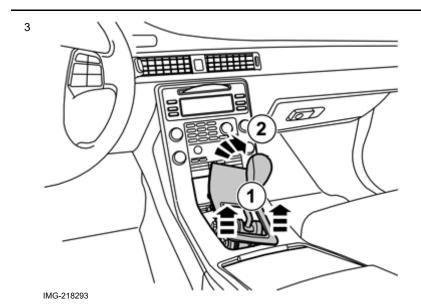

Twist / remove the panel, so that the row with switches/dummy buttons is accessible.

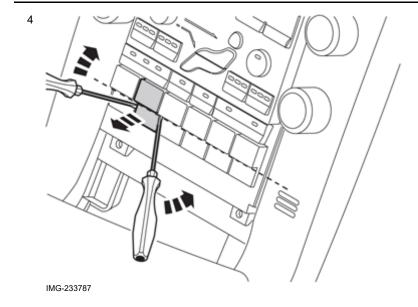

The new switch must be fitted in the first available button location seen from the steering wheel.

Note!

The illustrations show a left-hand drive car.

Hint


In the cases where the switch shall be located furthest out in the button row, first remove the closest adjacent dummy to avoid damaging the centre console panel:

Remove the penultimate dummy button in the button row by carefully prizing it out using two small screwdrivers as illustrated.

Note!

Always prize against the surfaces that are subsequently covered by the gear selector lever panel (under the dotted line).

Volvo Car Corporation Gothenburg, Sweden

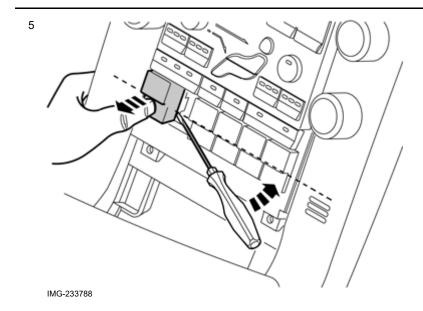


Carefully prize away the dummy button where the new switch shall be fitted. Use the thumb of your other hand to counterhold at the same time.

Note!


Do not insert the screwdriver so far that the circuit board in the bottom is damaged.

Place the dummy button that shall not be re-used to one side.

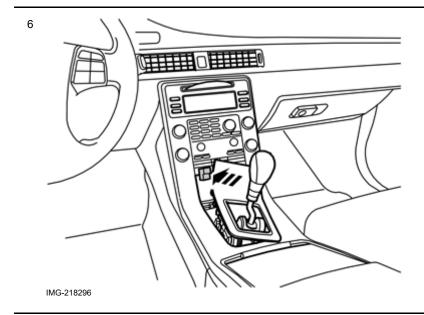

Install the new switch from the kit, and any dummy button.

Volvo Car Corporation Gothenburg, Sweden

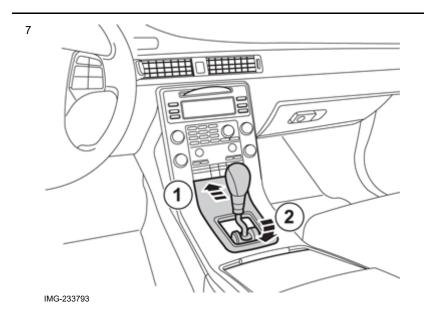

Reinstall the panel around the gear selector lever