

Volvo Car Corporation Gothenburg, Sweden

Instruction No 31269640 Version 1.0 Part. No.

31265336, 31359685

Mudflaps, rear

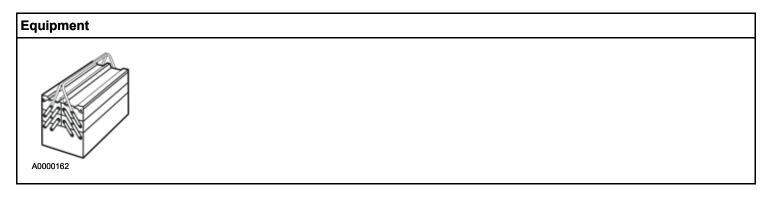

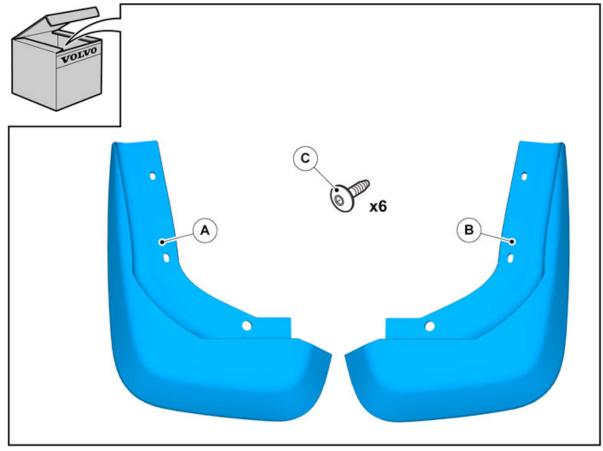

IMG-340377

Volvo Car Corporation Gothenburg, Sweden

INTRODUCTION


Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.


Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.



Remove the wheel.



Remove the screws. These will not be reused.


© Volvo Car Corporation Mudflaps, rear- 31269640 - V1.0

Volvo Car Corporation Gothenburg, Sweden

IMG-340379

3


Clean the area where the mudflap is to be positioned.

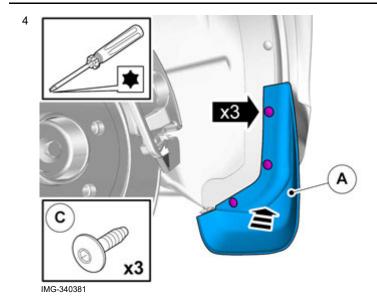

Install and screw the mudflap into place.

© Volvo Car Corporation Mudflaps, rear- 31269640 - V1.0

Volvo Car Corporation Gothenburg, Sweden



Reinstall the wheel.

Tightening torque: 140 Nm

Repeat the method steps for the other side.

© Volvo Car Corporation Mudflaps, rear- 31269640 - V1.0