

Volvo Car Corporation Gothenburg, Sweden

Instruction No 31346082 Version 1.0 Part. No.

31407107, 31346554, 31350479

Towbar, control module TRM

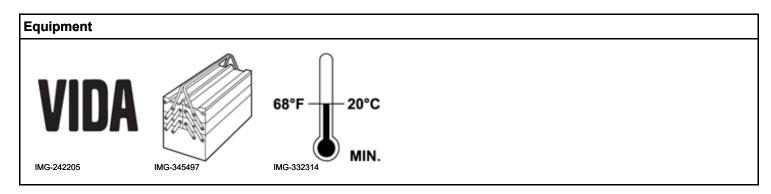

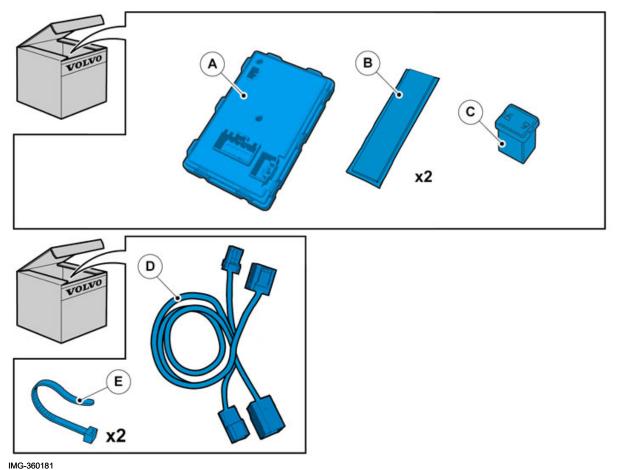

INTRODUCTION

Read through all of the instructions before starting installation.


Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.

Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

1




Turn the ignition key to position 0.

Note!


Wait at least one minute before unplugging the connectors or removing other electrical equipment.


IMG-245980

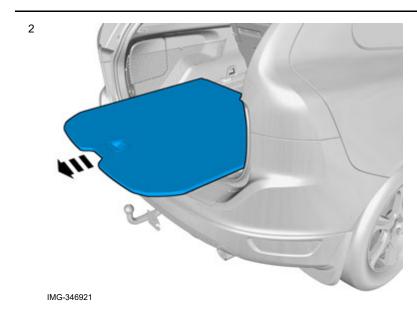


© Volvo Car Corporation

Volvo Car Corporation Gothenburg, Sweden

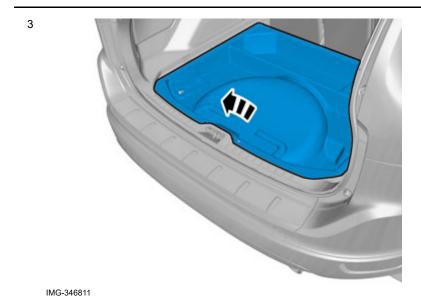

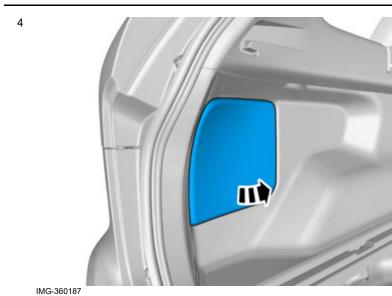

Volvo Car Corporation Gothenburg, Sweden

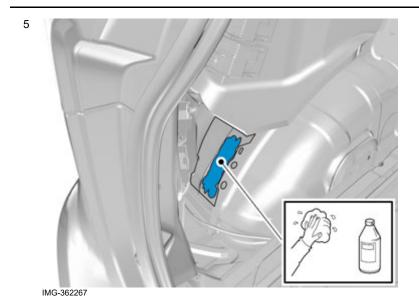


Use: Isopropanol, P/N 116172 Wipe dry.



Use: Isopropanol, P/N 1161721 Wipe dry.


7

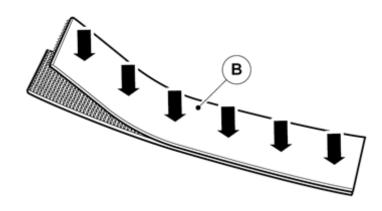


IMG-356181

IMG-222282



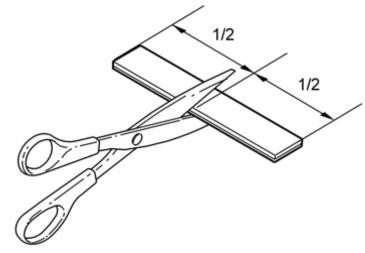


9



IMG-241925


10



When installing Velcro tape the surface must maintain a temperature of at least +20 $^{\circ}$ C (68°F).

IMG-356351

11



IMG-356352


12

Press the control module into place.

When installing Velcro tape the surface must maintain a temperature of at least +20 $^{\circ}$ C (68°F).

IMG-362292


Volvo Car Corporation Gothenburg, Sweden

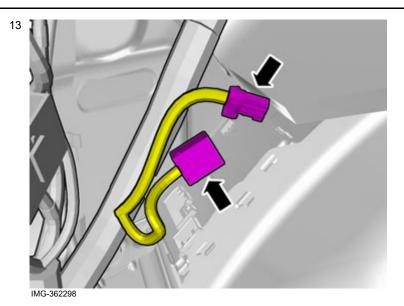

Applies to cars with model year from and including 2013-


Locate the connectors in the car's wiring harness.






Connect the located connectors.

Volvo Car Corporation Gothenburg, Sweden

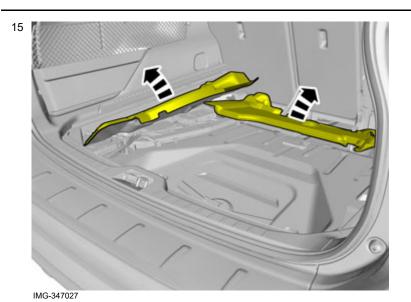

Applies to cars with model year up to and including -2012


Fold aside the insulation.

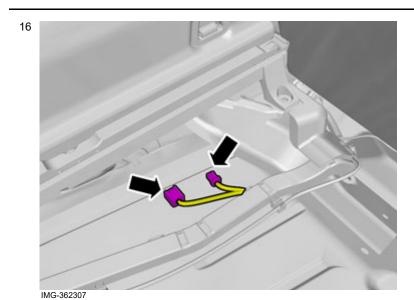


Locate the connectors.

17



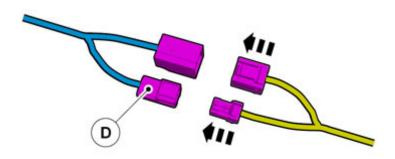


IMG-360183

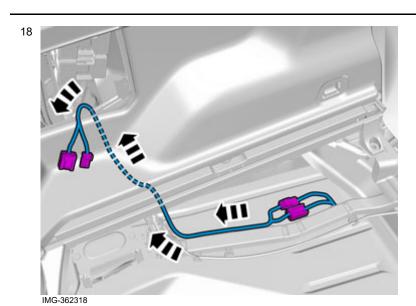

Route the extension cable following the existing cable harness.


Volvo Car Corporation Gothenburg, Sweden

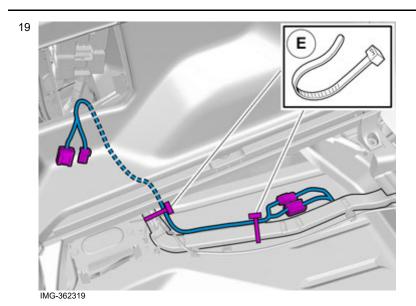

Route the extension cable following the existing cable harness.


Use cable ties to secure any excess.

20




Connect the connectors from the extension wiring to the control module.

Volvo Car Corporation Gothenburg, Sweden

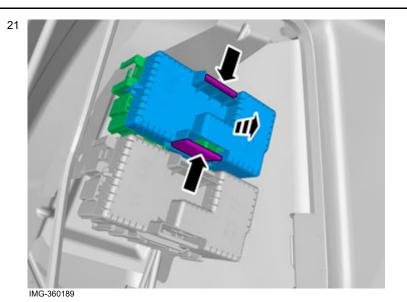

Applies to all models

Press in the catches on the black cover on the fuse holder and remove it.

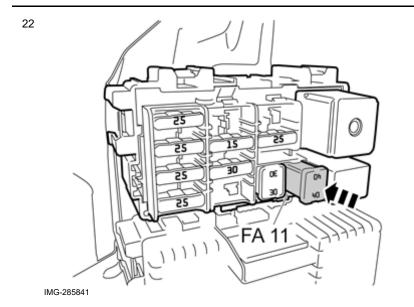


Install the 40A fuse in position FA 11 in module RJB-A.

Reinstall the cover.

23

Reinstall the detached components in reverse order.

Volvo Car Corporation Gothenburg, Sweden

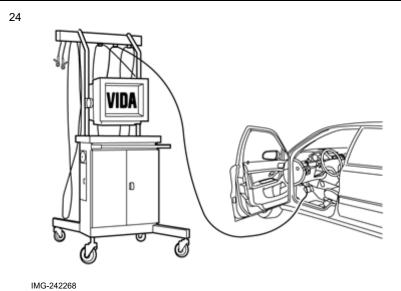

Download the software (application) for the accessory's function following the service information in VIDA.

See VIDA or the accessories catalogue for software part number.