
Volvo Car Corporation Gothenburg, Sweden

Instruction No 8624493

Version 1.1


Part. No. 30721722, 30721724, 30721723

Protective grille, steel, second row of seats

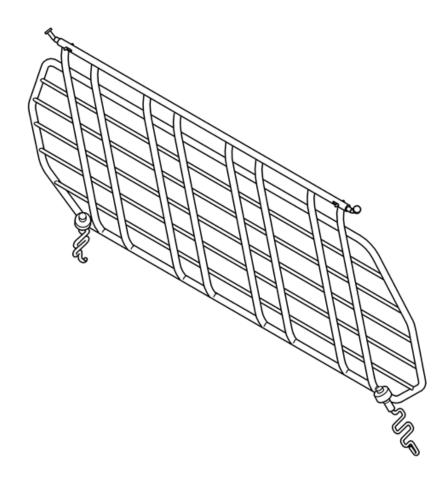

R8902546

Volvo Car Corporation Gothenburg, Sweden

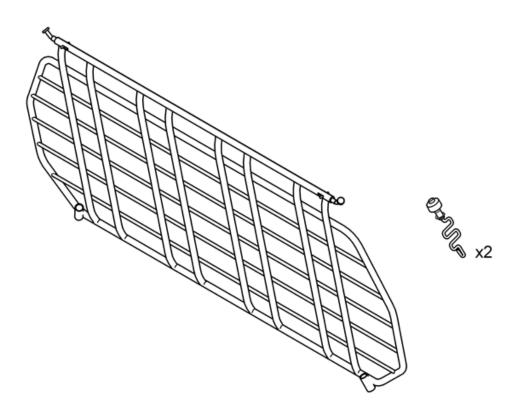

R8902513

Volvo Car Corporation Gothenburg, Sweden

INTRODUCTION

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.

Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.


In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

Note!

Remove the front of the cargo compartment cover when using together with a cargo compartment safety grille. This will prevent any rattling. See point 1-4.

Preparations cargo compartment cover

1



Preparations cargo compartment cover

Applies to cars with a cargo compartment cover

Remove the cargo compartment cover from the car


Carefully pry out both the rubber edgings on the front short section of the cargo compartment cover. Use a small screwdriver. Remove the rubber edgings

Remove the steel edging inside the rubber edgings (if they did not come off when the rubber edgings were removed).

R8504424

Volvo Car Corporation Gothenburg, Sweden

2




Applies to cars with cargo compartment covers with Allen screws on the sides

Remove the Allen screws (1.3 mm), or ordinary screws, on one edge of the front of the cargo compartment cover. $\frac{1}{2} \left(\frac{1}{2} - \frac{1}{2} \right) = \frac{1}{2} \left(\frac{1}{2} - \frac{1}{2}$

R8504425

3

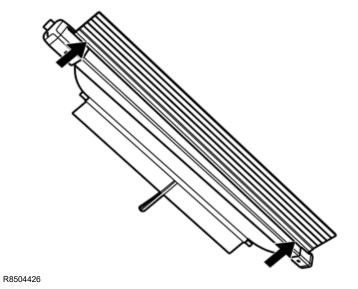

Applies to cars with cargo compartment covers with screws on the underside

Remove both the screws from the underside of the front of the cargo compartment cover.

Volvo Car Corporation Gothenburg, Sweden


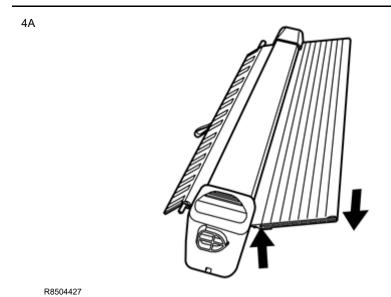


Illustration A

Pull the front section of the cargo compartment cover from the channel in the rear section and put it to one side.


Illustration B

The cargo compartment cover without its front section will be reinstalled in point 7.

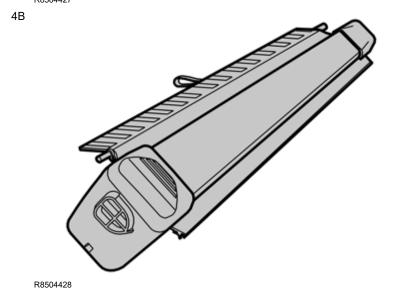


Installing the cargo compartment safety grille

Volvo Car Corporation Gothenburg, Sweden

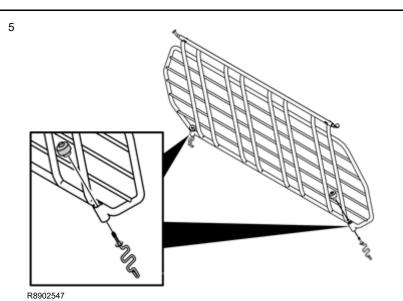

Installing the cargo compartment safety grille

Detach the mounting, knob and cap from each other.

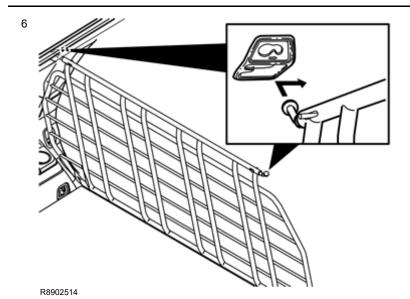


Lift the cargo compartment safety grille in through the tailgate or through one of the rear doors (fold down the second row of seats if using one of the rear doors)

Insert one mounting for the cargo compartment safety grille into the corresponding mounting above the rear door behind the second row of seats

Position the cargo compartment safety grille mounting in the front position in the other mounting

Position the other mounting for the cargo compartment safety grille over the other rear door and move it into the front position.

Volvo Car Corporation Gothenburg, Sweden

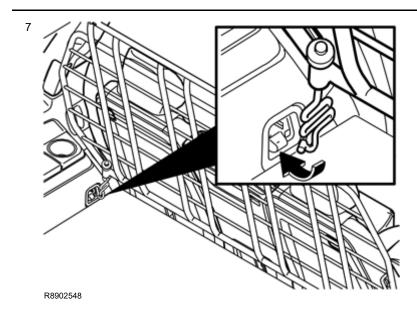

Insert the mounting bracket from underneath through the lower mounting in the cargo compartment safety grille as illustrated. Screw on the knob

Secure the mounting bracket hook in the load securing eyelet. Tighten the knob until the mounting bracket engages the load securing eyelet

Repeat the operation on the other side

Tighten both the mounting brackets alternately

Install the protective caps on the threads above the knobs

Reinstall the cargo compartment cover.

Warning!

Applies to cars with three rows of seats: The third row of seats must be folded down when the cargo compartment safety grille is installed. It is prohibited to sit in the cargo compartment behind a cargo compartment safety grille during a journey.