
Volvo Car Corporation Gothenburg, Sweden

Instruction No 32270879 Version 1.0 Part. No. 32270862


Protective plate, beneath the engine

| Special tools | |
|---------------|---------------------------------|
| | 981 4112 Drill |
| | Tool number:981 4112 |
| | Tool description:Drill |
| | Tool boards:EU99 |
| | 951 2782 Rivet nut tool |
| | Tool number:951 2782 |
| | Tool description:Rivet nut tool |
| | Tool boards:08 |

| Materials | |
|-------------------------------|-------------|
| Designation | Part number |
| Rust inhibitor, low viscosity | |

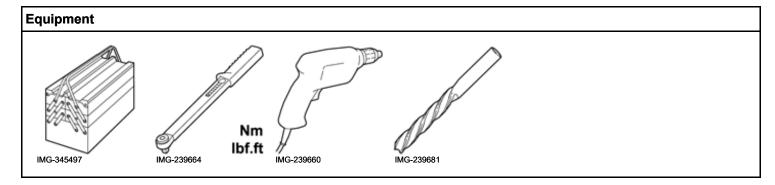

Volvo Car Corporation Gothenburg, Sweden

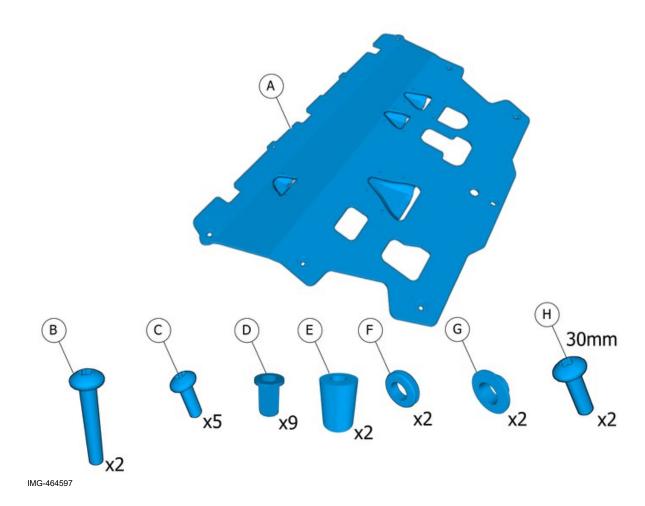

Volvo Car Corporation Gothenburg, Sweden

Information

1

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.


Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

Color symbols

2

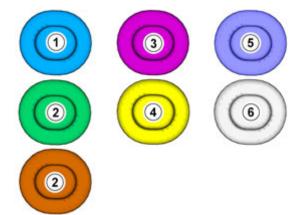


Note!

This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- Used for focused component, the component with which you will do something.
- 2. Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6. Used as background color for vehicle components.


Removal

Volvo Car Corporation Gothenburg, Sweden

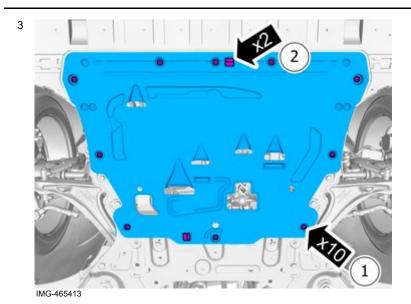

- 1. Remove the screws.
- 2. Remove the clips.

The part is not to be reused.

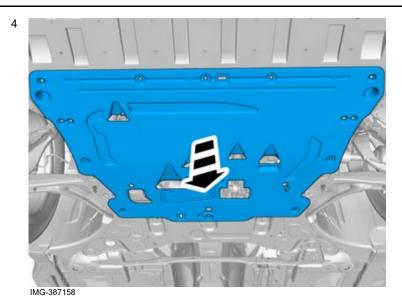

Remove the panel.

The part is not to be reused.

Accessory installation

Volvo Car Corporation Gothenburg, Sweden

IMG-382659


5 981-4112

Warning! Wear protective gloves.

Warning! Wear safety goggles.

Drill the holes.

Use special tool: T9814112, Drill

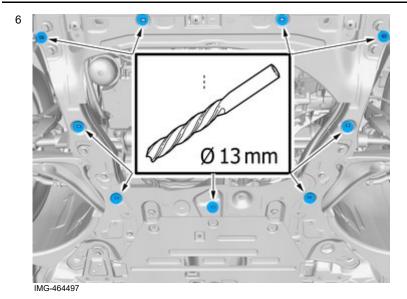


Warning! Wear protective gloves.


Warning! Wear safety goggles.

Drill the holes.

Volvo Car Corporation Gothenburg, Sweden

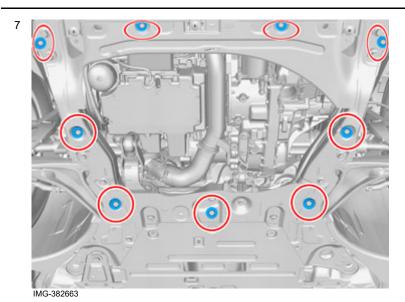


Use: , Rust inhibitor, low viscosity

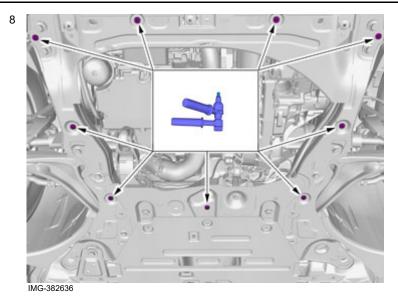

Note! Orientation view

Volvo Car Corporation Gothenburg, Sweden

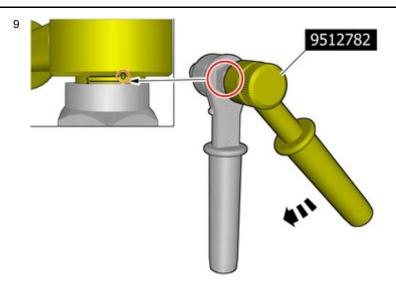


Use special tool: T9512782, Rivet nut tool

Reset the tool.

IMG-372305




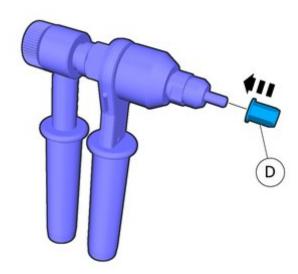

Volvo Car Corporation Gothenburg, Sweden

Use hands only.

The outermost thread of the tool should be flush with the rivet nut end

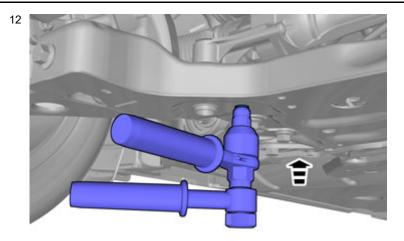


Press the tool against the surface.

Hold the tool at right angles to the surface.


IMG-372295

Volvo Car Corporation Gothenburg, Sweden

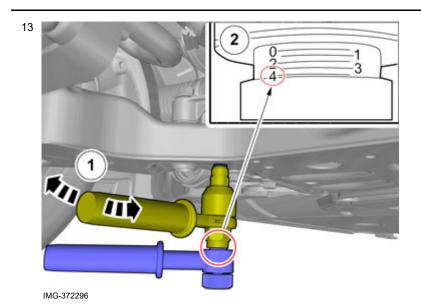

Tighten to the value stated.

14

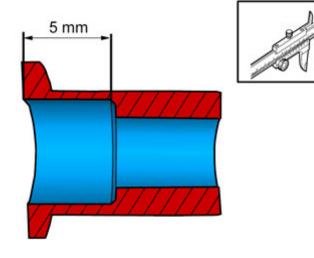


Measure

Use: Vernier caliper


Volvo Car Corporation Gothenburg, Sweden

15

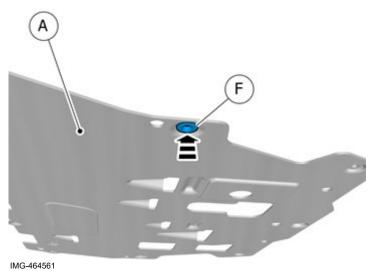

Install components that come with the accessory kit.

Repeat on the other side.

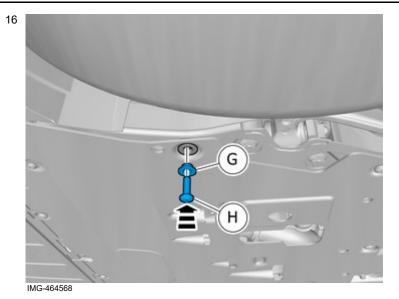

Note!

Do not fully tighten the bolts.

Install components that come with the accessory kit.


Use the black screws.

Repeat on the other side.


Volvo Car Corporation Gothenburg, Sweden

17

Note! Orientation view

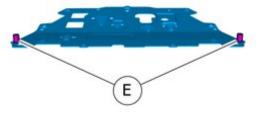

IMG-464503

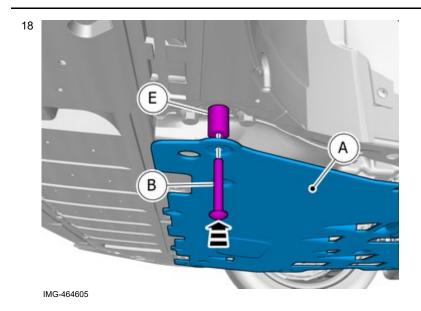


Note!

Do not fully tighten the bolts.


Install the screws.

Volvo Car Corporation Gothenburg, Sweden

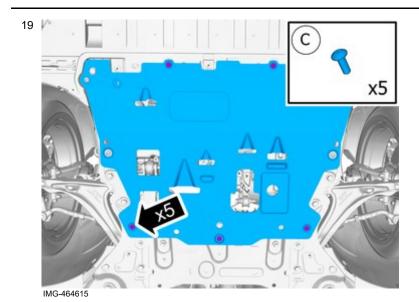

Tighten the bolts.

Tightening torque: M10, 50 Nm

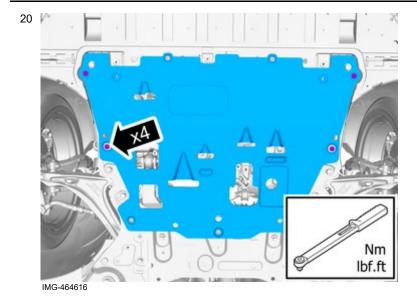

Tighten the bolts.

Tightening torque: M10 , 50 Nm